


BALL VALVE N.O.	
BALL VALVE N.C.	
Y-STRAINER	
REDUCER	
CONNECTOR	
PRESSURE RELIEF VALVE	
PRESSURE GAUGE WITH DIAPHRAGM SEAL	
BACK PRESSURE VALVE	
ANALOG SIGNAL (4-20mA DC)	
DIGITAL SIGNAL	
SUPPLY POWER	

DRAWING NUMBER	PDUP-WM-050PVC-M101-S-0		1	1
REV	REVISION DESCRIPTION	DATE	APP	
	FOR APPROVAL	6/26/2026	JR	

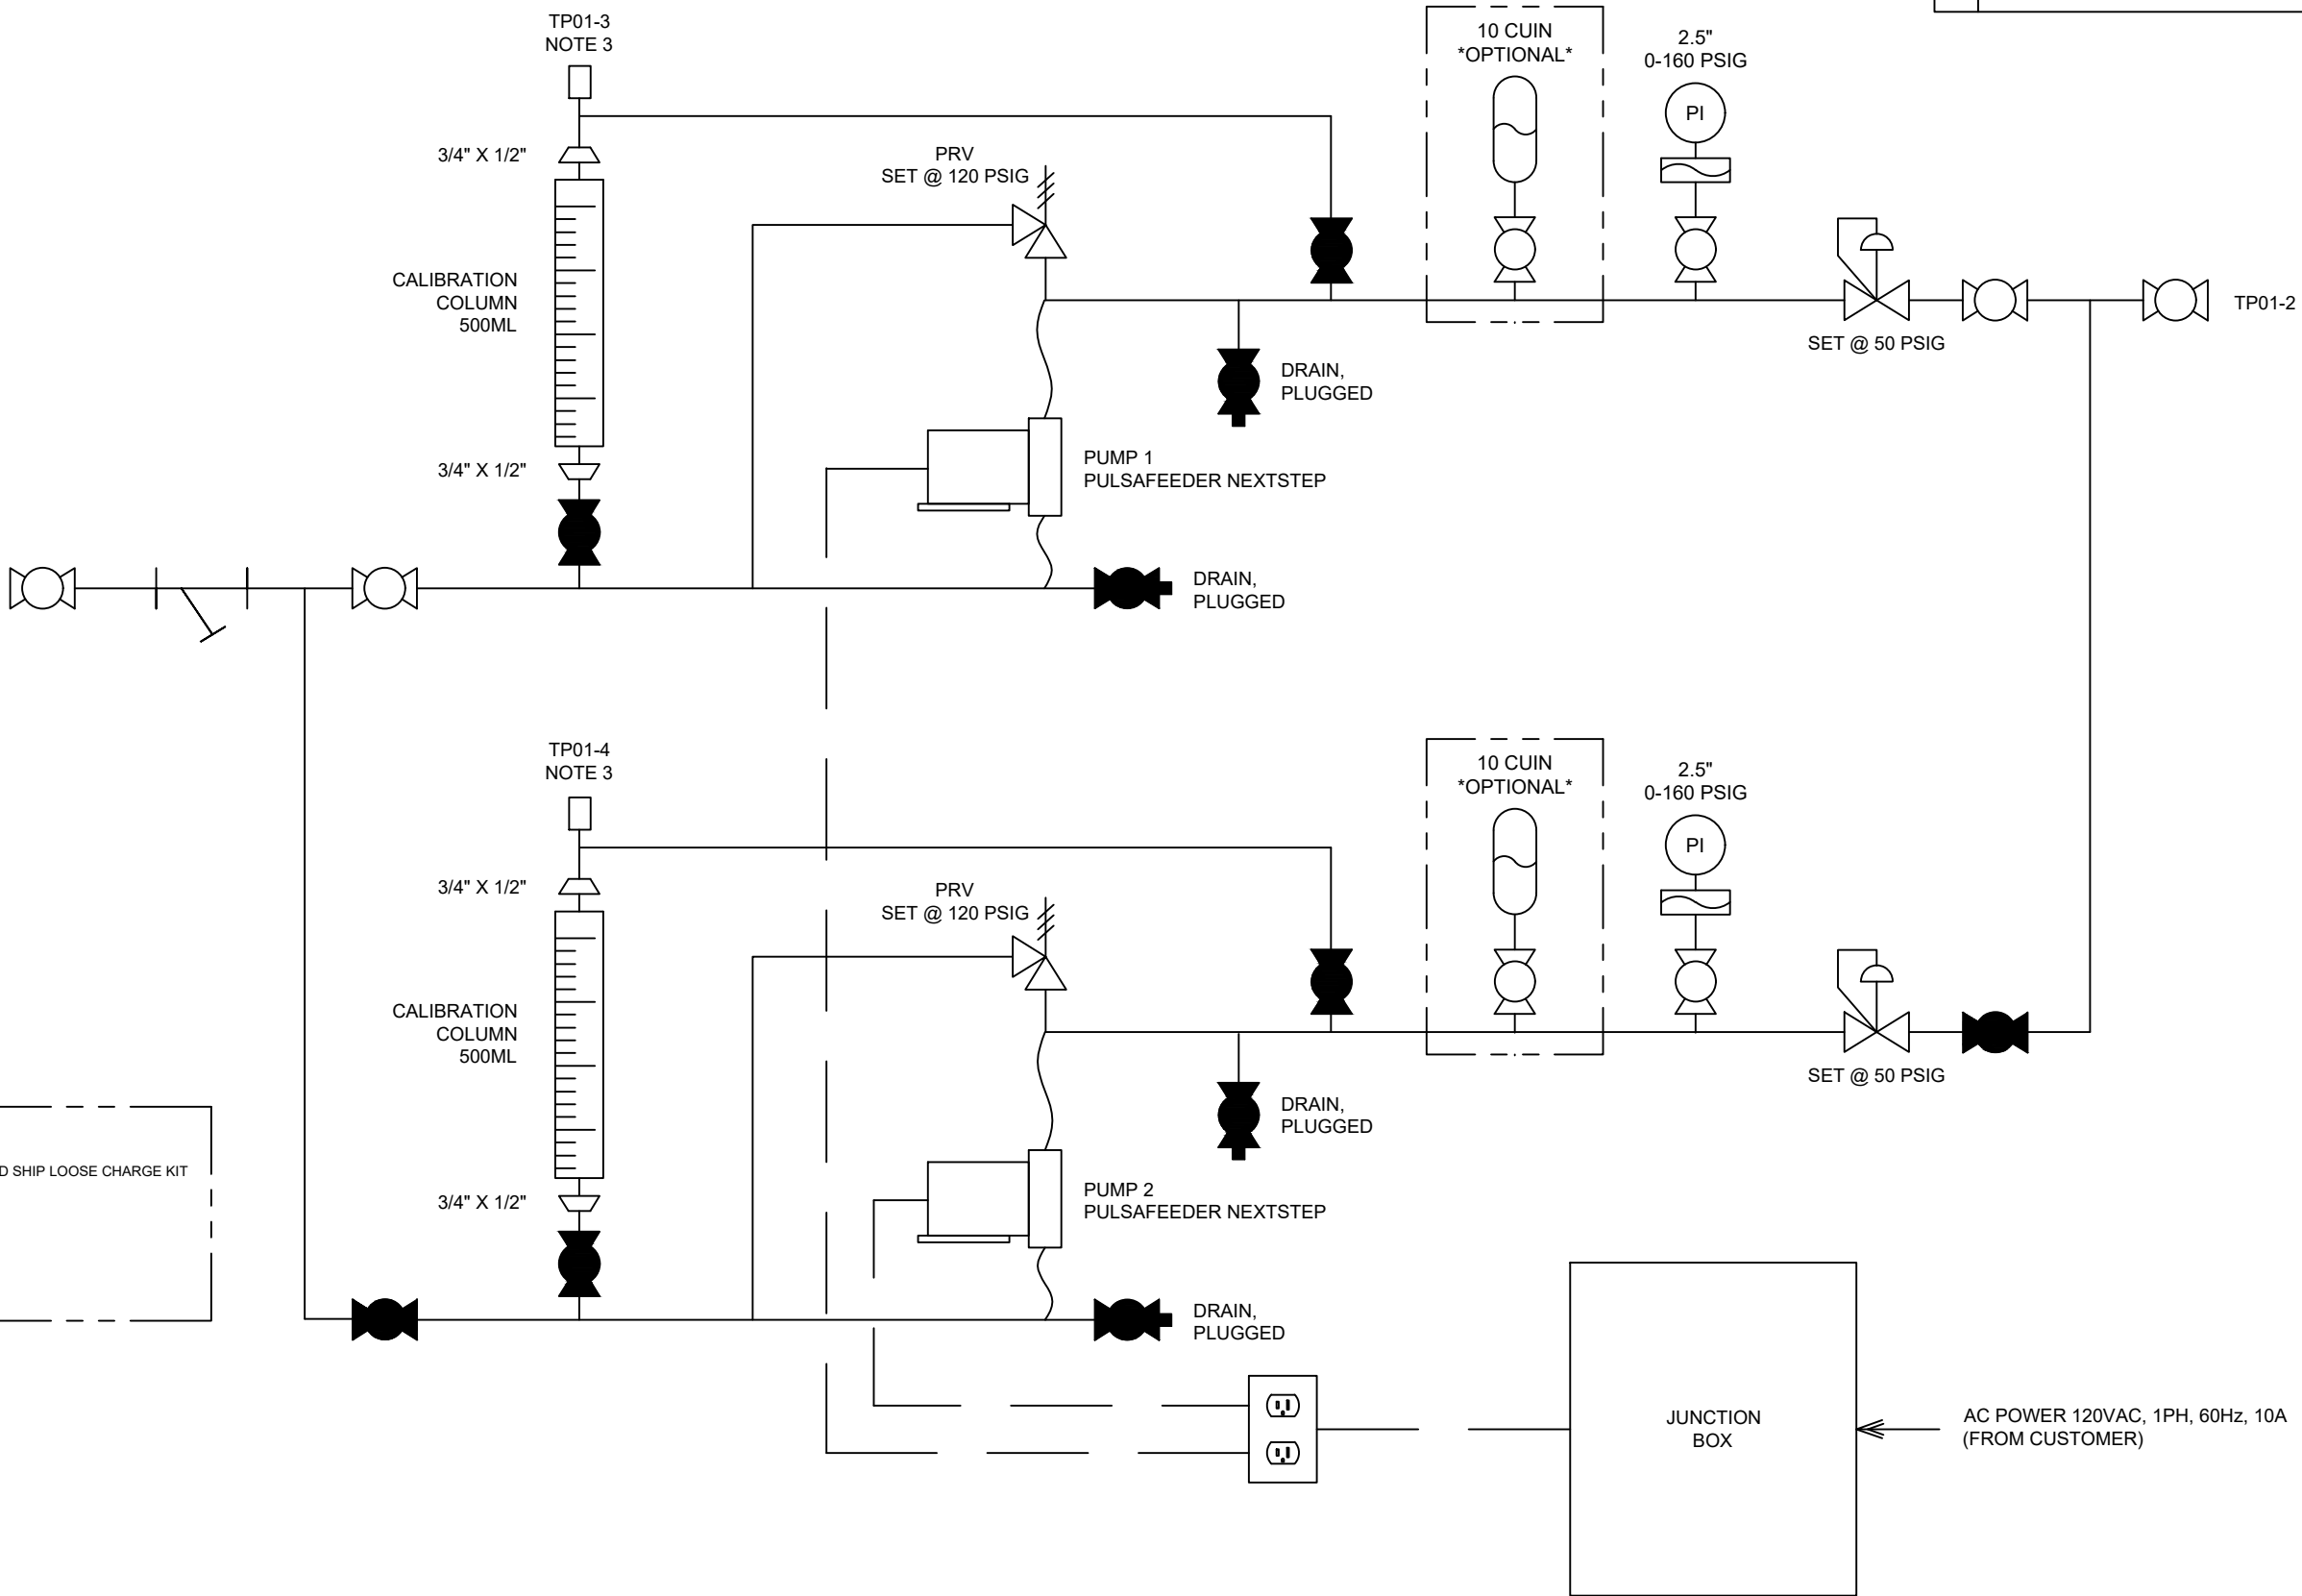

- ADDITIONAL OPTIONS:
- 1) 10 CUIN PULSATION DAMPENER WITH ISOLATION VALVE AND SHIP LOOSE CHARGE KIT
 - 2) LOCAL CONTROL PANEL FOR TWO-PUMP OPERATION
 - 3) SYSTEM AVAILABLE IN OTHER MATERIALS -
 - CPVC
 - PVC (VENTED BALL VALVES)
 - CPVC (VENTED BALL VALVES)
 - PVDF
 - SS

CONNECTIONS:

TP01-1 - SYSTEM INLET - 1/2" F-NPT
TP01-2 - SYSTEM OUTLET 1 - 1/2" F-NPT
TP01-3 - SYSTEM OUTLET 2 - 1/2" F-NPT
TP01-4 - CAL. COLUMN VENT - 1/2" F-NPT

- NOTES:
1. ALL PIPING - PVC, SCH. 80
 2. ALL FITTINGS - PVC, SCH. 80, SW, VITON OR EPDM O-RINGS
 3. CAL. COLUMN VENT TO BE ROUTED BACK TO TANK IN FIELD BY OTHERS

000	PDUP-WM-050PVC-M101-S	--	--					--
SUFFIX	PART NUMBER LESS SUFFIX		QTY	DESCRIPTION OR MATERIAL				ITEM
	INTERPRET GEOMETRIC TOLERANCING PER ASME Y14.5M-1994			PROJECT NUMBER PULSAFEEDER STANDARDS				DWN PW 6/26/2026
	TOLERANCE UNLESS OTHERWISE SPECIFIED			ECN: N/A				APP JR 6/26/2026
	X.XX IN ± .005 IN SURFACES							TITLE DUPLEX CHEMICAL FEED SKID PVC, 1/2", WALL MOUNTED P. & I. DRAWING
	X.XXX IN ± .005 IN EDGES							
	X.XXX IN ± .005 IN RFS							
	X.XXX IN ± .005 IN RFS							
BREAK ALL SHARP EDGES AND R. MAX. 1/16"			FILE				SCALE NONE SHEET 1 OF 1 SIZE D	
ALL DIMENSIONS IN INCHES			PDUP-WM-050PVC-M101-S					
PROPRIETARY DATA: THIS DOCUMENT DISCLOSES INFORMATION AND DATA IN WHICH PULSAFEEDER HAS PROPRIETARY RIGHTS. THE RIGHT TO REPRODUCE, USE OR DISCLOSE IN WHOLE OR IN PART EXCEPT BY WRITTEN PERMISSION IS PROHIBITED.								