



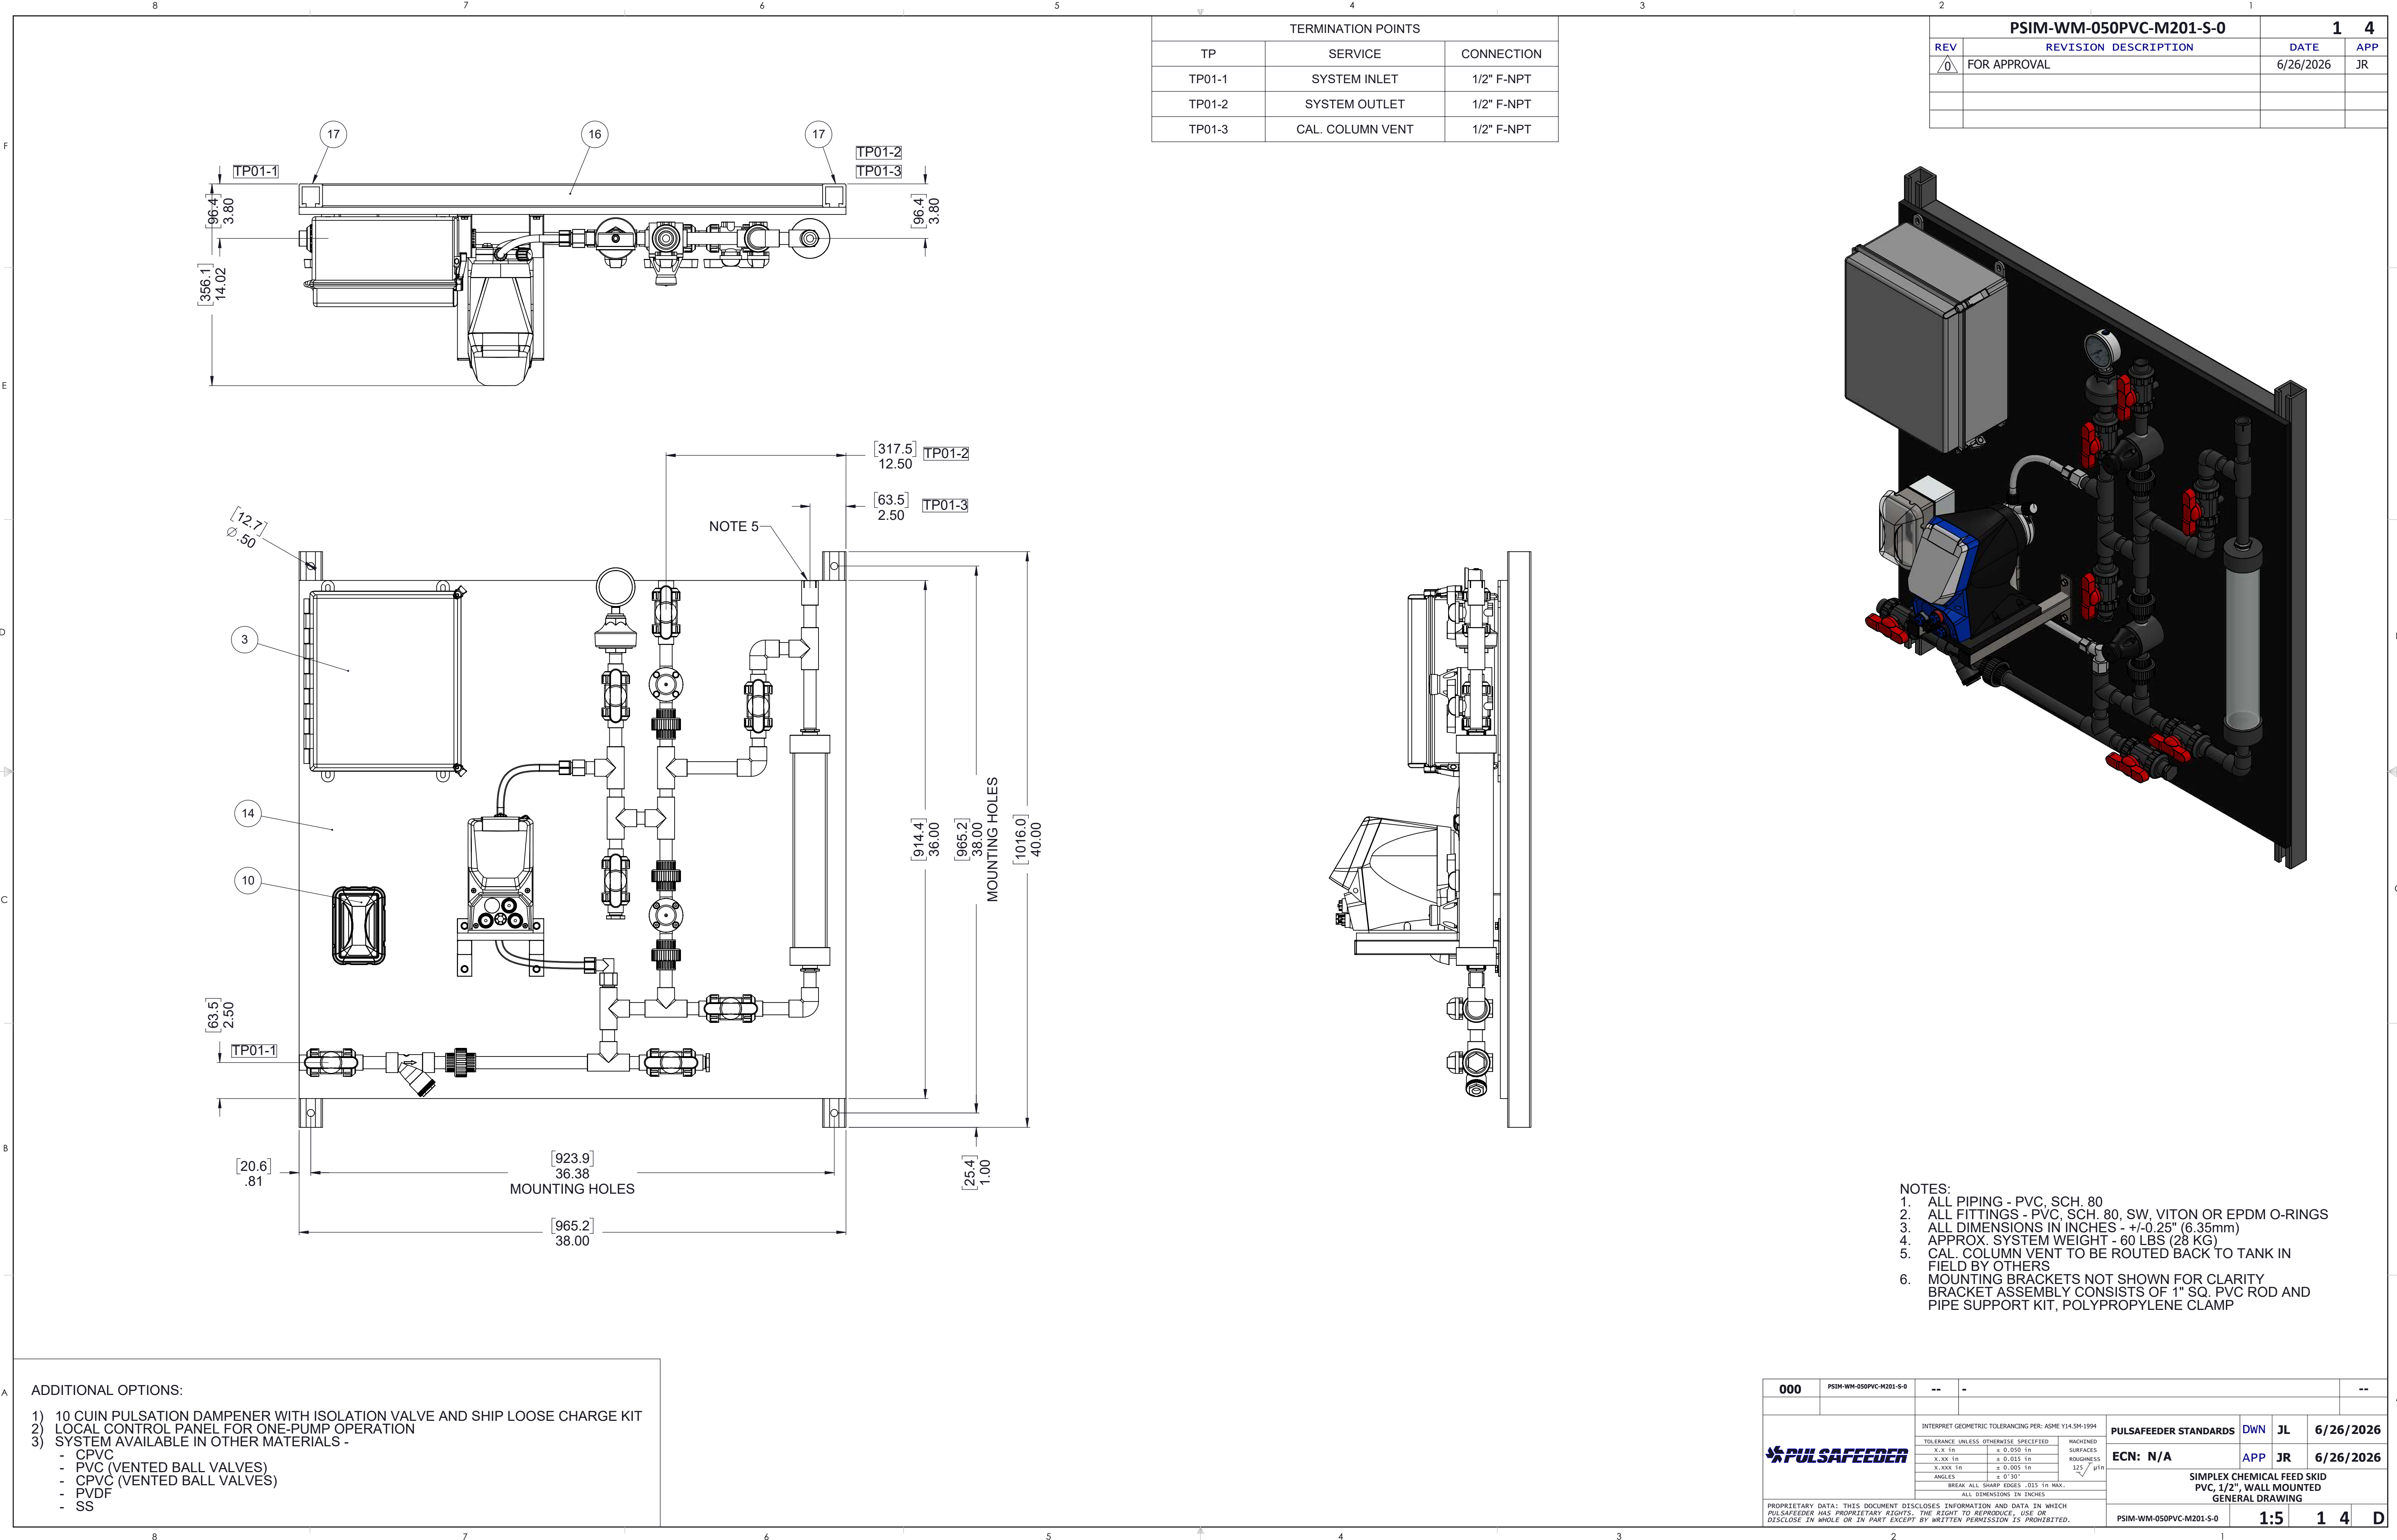

TERMINATION POINTS		
TP	SERVICE	CONNECTION
TP01-1	SYSTEM INLET	1/2" F-NPT
TP01-2	SYSTEM OUTLET	1/2" F-NPT
TP01-3	CAL. COLUMN VENT	1/2" F-NPT

PSIM-WM-050PVC-M201-S-0			1	4
REV	REVISION	DESCRIPTION	DATE	APP
0	FOR APPROVAL		6/26/2026	JR

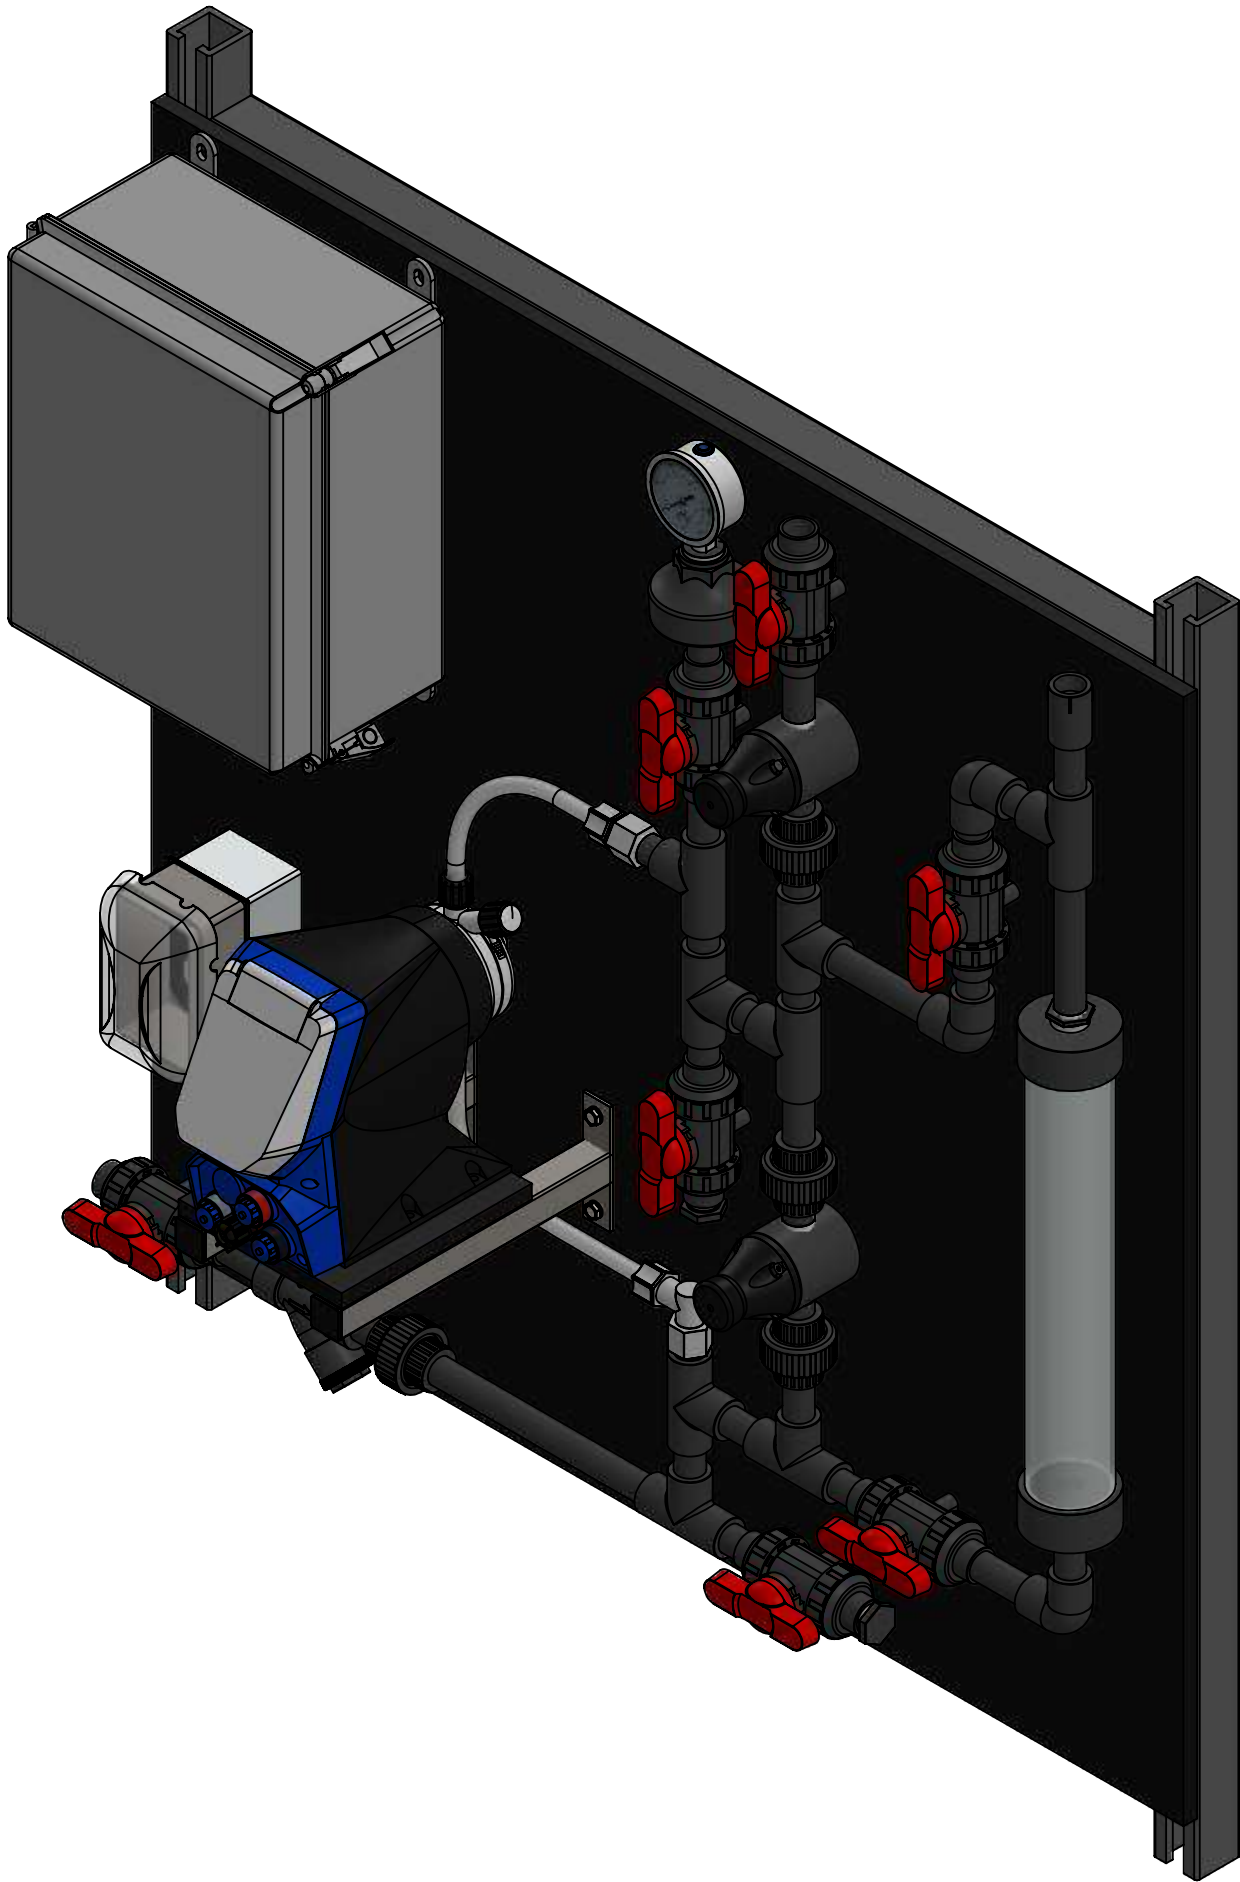

- NOTES:
1. ALL PIPING - PVC, SCH. 80
 2. ALL FITTINGS - PVC, SCH. 80, SW. VITON OR EPDM O-RINGS
 3. ALL DIMENSIONS IN INCHES - +/-0.25" (6.35mm)
 4. APPROX. SYSTEM WEIGHT - 60 LBS (28 KG)
 5. CAL. COLUMN VENT TO BE ROUTED BACK TO TANK IN FIELD BY OTHERS
 6. MOUNTING BRACKETS NOT SHOWN FOR CLARITY
BRACKET ASSEMBLY CONSISTS OF 1" SQ. PVC ROD AND PIPE SUPPORT KIT, POLYPROPYLENE CLAMP

ADDITIONAL OPTIONS:

- 1) 10 CUIN PULSATION DAMPENER WITH ISOLATION VALVE AND SHIP LOOSE CHARGE KIT
- 2) LOCAL CONTROL PANEL FOR ONE-PUMP OPERATION
- 3) SYSTEM AVAILABLE IN OTHER MATERIALS -
 - CPVC
 - PVC (VENTED BALL VALVES)
 - CPVC (VENTED BALL VALVES)
 - PVDF
 - SS

000	PSIM-WM-050PVC-M201-S-0	--	--	--
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994		
		TOLERANCE UNLESS OTHERWISE SPECIFIED		
		X.X 1n	± 0.050 1n	W/CHAINED SURFACES
		X.XX 1n	± 0.015 1n	ROUGHNESS
		X.XXX 1n	± 0.005 1n	125 / 401n
		ANGLES	± 0° 30'	
		BREAK ALL SHARP EDGES .015 1n MAX.		
		ALL DIMENSIONS IN INCHES		
PROPRIETARY DATA: THIS DOCUMENT DISCLOSES INFORMATION AND DATA IN WHICH PULSAFEEDER HAS PROPRIETARY RIGHTS. THE RIGHT TO REPRODUCE, USE OR DISCLOSE IN WHOLE OR IN PART EXCEPT BY WRITTEN PERMISSION IS PROHIBITED.		PULSAFEEDER STANDARDS		
		ECN: N/A	DWN JL	6/26/2026
		APP JR		6/26/2026
		SIMPLEX CHEMICAL FEED SKID PVC, 1/2", WALL MOUNTED GENERAL DRAWING		
		PSIM-WM-050PVC-M201-S-0	1:5	1 4 D

A B C D E F

A