


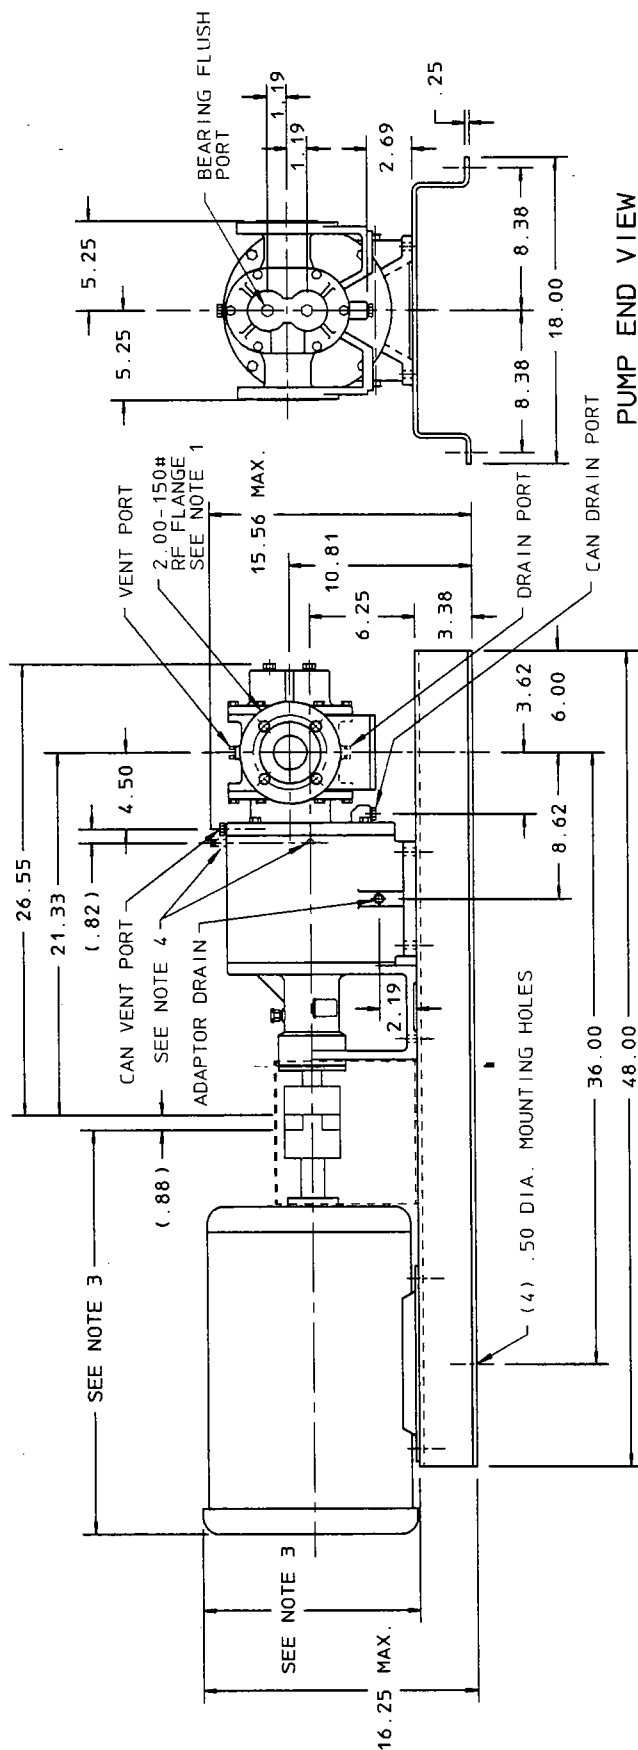

PUMP END VIEW

NOTE:

- 1.) SUCTION AND DISCHARGE PORTS DEPENDENT ON DIRECTION OF ROTATION.
- 2.) ALL STANDARD AND OPTIONAL PIPE PLUGS ARE (1/4" N.P.T.).
- 3.) MOTOR DIMENSIONS VARY BY MANUFACTURER. CONSULT MANUFACTURERS DRAWING FOR SPECIFICS. BASE WILL ACCOMMODATE MOTOR FRAME SIZES, 112M, 132S.
- 4.) (2) 1/8" NPT PIPE CONNECTION PORTS ARE STANDARD WITH DOUBLE CAN OPTION. STANDARD ASSEMBLY IS LEFT/TOP CONNECTION PORT ORIENTATION WHEN VIEWED FROM PUMP END. CUSTOMER TO SPECIFY WHEN RIGHT/TOP CONNECTION PORT ORIENTATION IS REQUIRED.

ALL DIMENSIONS ARE IN INCHES

Isochem **PULSAFEEDER**
A Unit of IDEX Corporation

DIMENSIONAL DRAWING
GM16 PUMP MOUNTED
METRIC INPUT SHAFT

DWN BY: CLA
DATE: 04/04/94

SD-2793

REF	REVISION UPDATE	DATE
	REVISION UPDATE	10/08/97

SECTION/PAGE	MODEL GM16/305
EFFECTIVE	04/01/98
SUPERSEDES	04/04/94