

PULSAFEEDER®

The Pulsafeeder diaphragm Pressure Relief Valves are designed to protect chemical feed systems from over pressure damage caused by defective equipment or a blockage in the chemical feed line. Robust construction ensures reliability in the rigorous service of municipal and industrial applications. Wetted materials include: PVC, PVDF, PTFE, 316SS. Available sizes: 1/2" – 1.5".

Pulsafeeder diaphragm Pressure Relief Valves operate when the pressure in the chemical system exceeds the preset pressure of the valve. The diaphragm is held against the valve seat by an internal spring.


When the preset pressure is exceeded the diaphragm is forced up and the chemical flows out the relief port, back to the chemical tank or to the suction side of the pump. The valves are pre-set at 50 psi, however they are field adjustable from 10 - 150 or 250 psi, via the adjustment screw. The relief valve should be set approximately 15 psi higher than the system pressure. Installation should be made as close to the pump as possible, without any valves or accessories between the relief valve and the pump.

Features

- Reliable
- Low Cost
- No Bolts on Plastic Models.
- Compact Size.
- Robust, Machined Construction.
- Wide Range of Materials.

Operating Benefits

- Adjustable 10-150 psi
- 10-250 psi Stainless only
- Vulcanized PTFE/EPDM Diaphragm

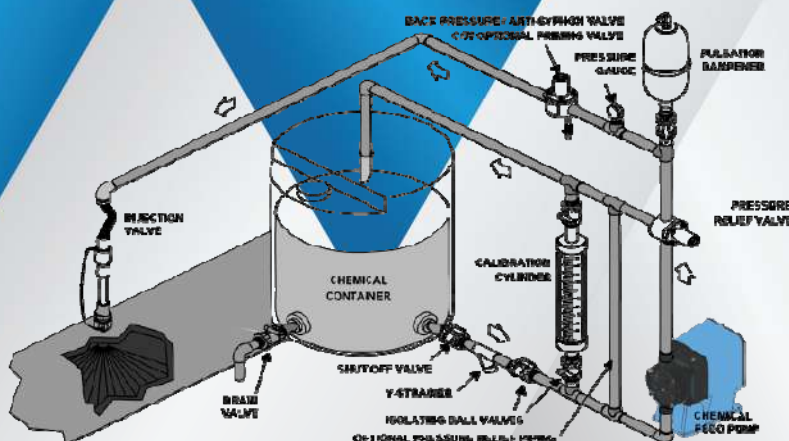

Aftermarket

- Double Wall Containment Tanks from 15 to 500 gallons.
- 1, 2, or 4 Drum Spill Containment Pallets.
- Loading Ramp and Pallet with or without Cover.



Pressure Relief Valve

Pressure Relief Valve

Specifications and Model Selection

Pressure Relief Valves	1/2"	PVC/TFE	10-250 PSI	NA100001-PVC
	1/2"	PVDF/TFE	10-250 PSI	NA100001-PVD
	1/2"	SS/TFE	10-150 PSI	NA100001-316
	1"	PVC/TFE	10-150 PSI	NA100002-PVC
	1"	PVDF/TFE	10-150 PSI	NA100002-PVD
	1"	SS/TFE	10-150 PSI	NA100002-316
	1.5"	PVC/TFE	10-150 PSI	NA100003-PVC
	1.5"	PVDF/TFE	10-150 PSI	NA100003-PVD

Engineering Data


Size:	1/2"
	1.0"
	1.5"
Connections:	NPT
Pressure Relief Adjustment:	10-150 psi
	10-250 psi
Max Temperature:	PVC: 140°F
	PVDF: 280°F
	Metal: 300°F
Max. Operating Pressure @ 70°F: (psi)	Plastic/Noryl: 375 psi
	Metal/Metal: 2000 psi
Materials Of Construction:	PTFE/EPDM
Diaphragm:	Noryl (Threaded to Plastic
Valve Top:	Valves, Bolted to Metal Valves)
	Optional: 316SS.
Valve Body:	PVC
	PVDF
	316 SS
Flow Rate @ 150 psi	
Pulsating:	1/2" - 100 USgph
	1" - 500 USgph
	1 1/2" - 1200 USgph
Continuous:	1/2" - 15 USgpm
	1" - 26 USgpm
	1 1/2" - 63 USgpm

Dimensions

Size	A	B	C
1/2"	4.25	2.35	1.08
1"	5.86	3.5	1.25
1 1/2"	8.35	4.9	1.825

Note: 1 1/2" valves do not have bottom port

Performance Curves

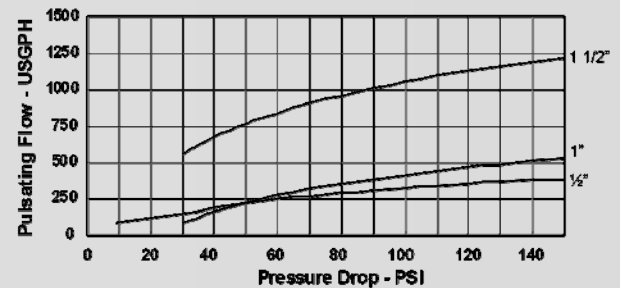


Custom Engineered Designs – Pre-Engineered Systems



Pre-Engineered Systems

Pulsafeeder's Pre-Engineered Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.

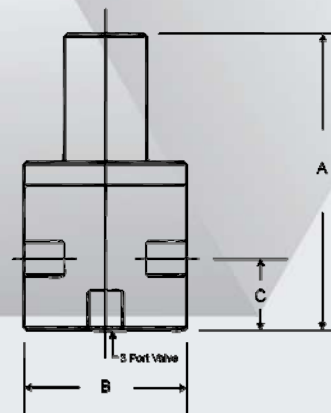

www.pulsatron.com



PULSAFEEDER

27101 Airport Road
Punta Gorda, FL 33982
Phone: +1(941) 575-3800
Fax: +1(941) 575-4085

An ISO 9001 Certified Company

PRV001 H26

IPX
FLUID & METERING