

Corrosion Coupon Racks

Built to ASTM Specifications

Our Corrosion Coupon Racks are hydrostatically tested for maximum system performance exceeding industry standards. Pulsafeeder's standard corrosion rack systems are designed to provide reliable, convenient side stream monitoring using ASTM standard coupons. These rugged systems are available for cool or hot water systems and can be configured for up to six monitoring stations.

Available options include quick release coupon holders, flow meters, y-strainers and more.

Features

- Schedule 80 PVC piping assembly and components for standard applications
- Schedule 40 black iron piping assembly and components for hot water applications
- All black iron racks are supplied on unistrut for easy installation
- Designed to ASTM specifications
- Wall mountable for easy installation
- Accepts ASTM test coupons
- Plastic pipe systems are mounted on 1/4" Poly panel


Applications

- Cooling Tower Systems
- Once-Thru Cooling
- Closed Loop Cooling
- Boiler Water Systems



Aftermarket

- Solenoid Valves
- Paddle Wheel Meter
- Calibration Solutions
- Coupons
- Coupon Holder

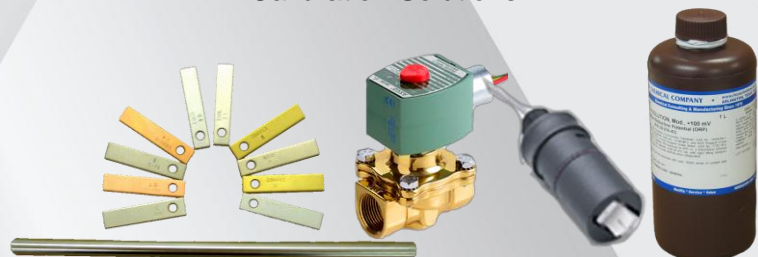

Corrosion Coupon Racks

Corrosion Coupon Racks

Specifications and Model Selection

| | |
|-----|---|
| CCR | Standard system includes PVC coupon holder, nylon screw and nut, PVC inlet ball valve, 0.75 in. (19 mm) piping, and Schedule 80 PVC mounted on 1/4" HDPE with corrosion resistant plastic pipe mounts. Coupons not included. |
|-----|---|

Number of Stations

| | |
|----|---|
| 10 | 12 in. H x 22 in. W (305 x 559 mm) Panel Size |
| 20 | 16 in. H x 22 in. W (406 x 559 mm) Panel Size |
| 30 | 20 in. H x 22 in. W (508 x 559 mm) Panel Size |
| 40 | 28 in. H x 22 in. W (711 x 559 mm) Panel Size |
| 50 | 32 in. H x 22 in. W (813 x 559 mm) Panel Size |
| 60 | 36 in. H x 22 in. W (914 x 559 mm) Panel Size |

| | |
|-------|---|
| Blank | Optional Piping 0.75 in. (19 mm) Schedule 80 PVC standard |
| A | 1.00 in. (25 mm) PVC piping, max. 150 psi (10.4 bar) 140° F (60° C) |
| B | 0.75 in. (19 mm) CPVC piping, max. 150 psi (10.4 bar) 212° F (100° C) |
| C | 1.00 in. (25 mm) CPVC piping, max. 150 psi (10.4 bar) 212° F (100° C) |
| D | 0.75 in. (19 mm) black iron piping, max. 250 psi (17.3 bar) 212° F (100° C) |


Available options (Append Codes For Multiple Selections)

| | |
|------|---|
| X1 | Quick Release coupon holders (PVC only) |
| X4 | 0.75 in. hot/cold water flow meter, Max. 100 psi (7 bar) @ 130°F (54°C). |
| X6 | 1.00 in. cold water flow meter, Max. 100 psi (7 bar) @ 110°F (43°C). |
| X7 | PVC outlet ball valve, 3/4 blk iron units use 3/4" brass gate valve 300 psi |
| X8A | Y Strainer for 0.75 in. PVC |
| X8C | Y Strainer for 0.75 in. black iron |
| X8D | 0.75 in. Polypropylene bowl strainer 30 mesh. 150 psi max at 70° F (21° C) |
| X8E | 1.00 in. Polypropylene T strainer 30 mesh. 150 psi max at 70° F (21° C) |
| X9 | Clear PVC Pipe. Only available on .75 in. models. |
| F3 | Flow control valve 3 GPM (0.75 in. only) |
| F5 | Flow control valve 5 GPM (0.75 in. only) |
| 1F5 | Flow Control Valve 5 GPM (1" only) |
| 1F10 | Flow Control Valve 10 GPM (1" only) |
| Z4 | Sample/Drain port (PVC) only |


CCR **MODEL NUMBER**

A completed model number should look like "CCR20X1X7X9", for a 2 station Coupon Rack, with Quick Disconnects, Outlet Ball Valve and Clear PVC Pipe.

X4 Option Max Temp vs. Pressure

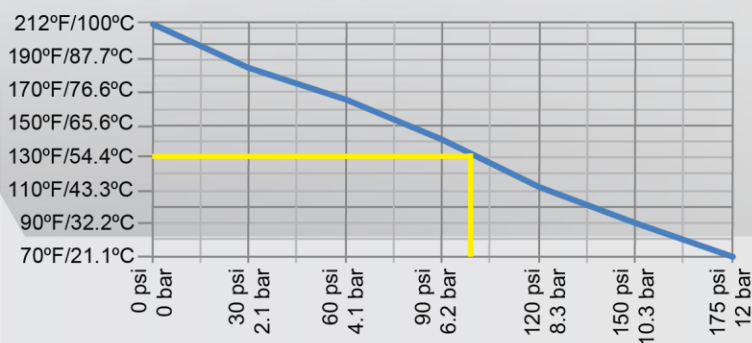

X6 Option Max Temp vs. Pressure

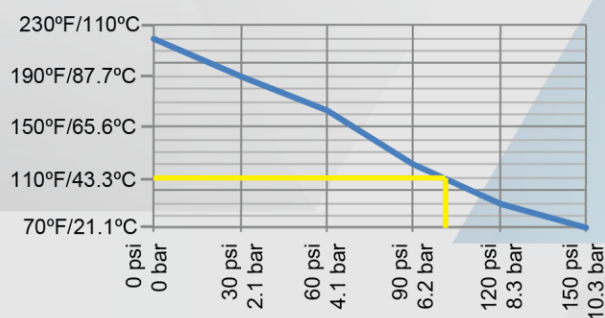

27101 Airport Road
Punta Gorda, FL 33982
Phone: ++1(941) 575-3800
Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

CCR002 J14

